

PrintGuard^{plus}™

Glass Bead
AntiMarking Products


SM52 Technical Sheets

I. Remove old Heidelberg chrome foil jacket (follow instructions per Heidelberg manual). This is an abridged summary. Always follow Safety precautions per manual.

Prep the transfer cylinder by removing the old Heidelberg chrome foil jacket.

Rotate the cylinder so the gripper end is exposed. Open the slot just below the grippers by loosening the 17mm locking bolt on edge of cylinder. Pry the chrome foil edge up and pull as you rotate the cylinder to the other edge. Loosen the 17mm bolt that opens the remaining slot and remove the chrome foil jacket. Clean out the slots with a flat piece of metal to ensure no debris/dried ink is obstructing the slot.

stainless steel strip is uniformly seated below the leading edge of the cylinder at the gripper end, you can use a see-saw action to slide the stainless steel edge to the bottom of the slot.

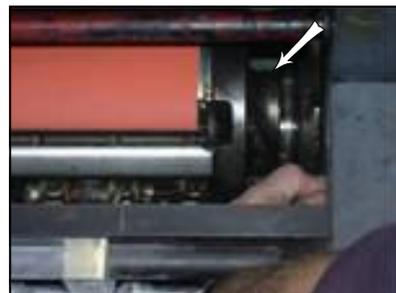

Rotate transfer cylinder and inspect for a good tight fit all around the cylinder. Verify the jacket is properly installed before running the press.



Ensure the jacket is centered on the cylinder and the leading edge of the SS strip is **uniformly below** the cylinder level and then tighten down the 17mm lockdown bolt.



II. Install new PrintGuardPus[®] Orange glass beaded jacket (No packing Required; the jacket comes pre-packed)

Lay the PrintGuardPus[®] jacket glass bead side up (Orange side up) on a clean surface with the 3/4" stainless steel edge oriented to be fitted into the cylinder first.

Slowly rotate the cylinder while holding the 3/8" SS end of jacket until the 3/8" SS edge is resting on the other edge of the cylinder. **The SS edge is sharp—exercise caution!**



Insert the 3/4" flat stainless steel strip into the pre-opened slot (centering the jacket on your press cylinder). Please ensure the flat



Fold the 3/8" stainless steel edge into the opened slot and ensure jacket is straight. Tighten the 17mm lockdown tensioning bolt.

III. Care and maintenance:

PrintGuardPus[®] glass beaded jackets are durable anti marking jackets and contain a permanently cross linked Orange silicone top coat. They typically last between 6-12 months depending on care and use. To maximize the life of these jackets we suggest you wash off any ink when you notice it building up in an area; do not let the ink dry, as dry ink is harder to remove and scrubbing too hard is when you can damage the jacket's surface.

Dilute your water miscible presswash 50/50 with water and dampen a soft cloth. Gently apply uniform pressure across the surface of the jacket.

Never use a screwdriver, knife, or sharp /abrasive tool on the surface of this jacket. Do not scrub excessively in one area, as you may abrade out glass beads if you scrub with too much pressure over a small area. Gentle uniform pressure will not damage the jacket.

SAFETY PRECAUTIONS:

Please remember to always ensure the press is in the shutoff/stop mode before placing your hands or tools near rotating parts of the press during installation of the jacket.